


Humidity Generator S-503

Series S-503



- **Generates and holds %RH Levels of 10, 20, 30, 50, 70 & 80% RH**
- **Fast Response: 0.5% Stability achieved in 10 minutes**
- **Built-in Power Supply for Transmitters**
- **Sample ports for up to five 18.5 mm (0.728") Probes**

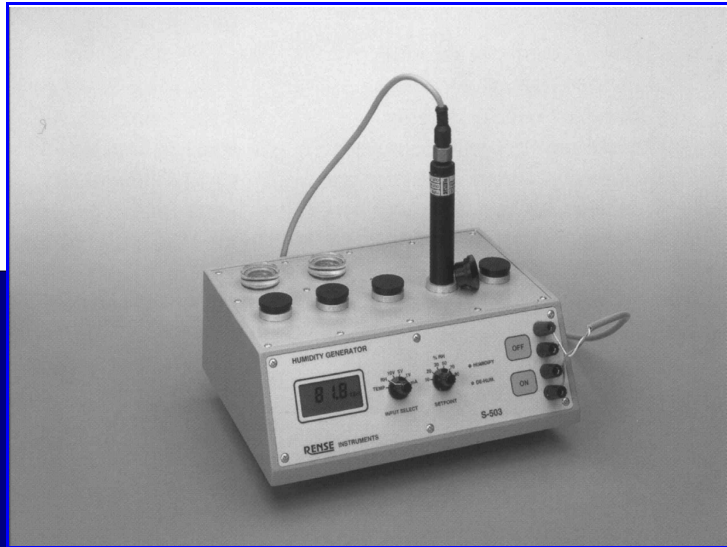

The S-503 humidity generator enables users of humidity sensors, transmitters and read-out devices to quickly and accurately generate reference humidity conditions.


These lightweight and self-contained units utilize a thin film capacitive sensor and closed loop controllers to modulate the flow of air through a saturator and desiccant. An axial fan continuously circulates

air through the test chamber for maximum humidity and temperature uniformity. This results in a system that stabilizes within 0.5% RH of the set point in about 10 minutes.

S-503's were designed with calibration technicians in mind. The calibrator is equipped with the convenience of a built in 15 VDC power supply and provides direct readout for 0-1V, 0-5V, 0-10V and

4-20 mA transmitters as well as %RH and temperature.

The unit has access ports for five 18.5 mm (0.728") OD Probes. To accommodate 8 mm and 12 mm probes separate adapters can be ordered. The S-503 is supplied with a factory certificate traceable to NAMAS standards. For higher precision an independent reference standard such as a chilled mirror hygrometer may be utilized.

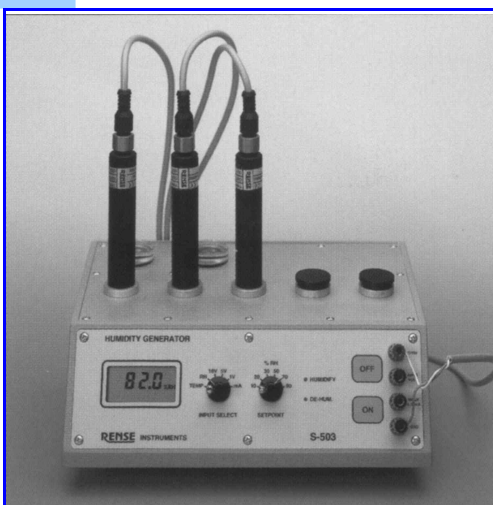

Test up to 5 Humidity probes simultaneously


Ordering information

Description	Model
Humidity Generator, incl. Power Supply adapter, desiccant and certificate	S-503
Accessories	Part number
0.25 kg Desiccant	A-000170
Adapter for 8mm (.315") probes (5pcs)	A-000180
Adapter for 12mm (.472") probes (5pcs)	A-000190
Blind Stop (5pcs)	A-000200

Specifications S-503

Power	12 VDC (120 or 230 VAC adapter supplied)
Humidity Range	10-80% RH
Relative Humidity set points	10, 20, 30, 50, 70 & 80% RH
Relative Humidity Accuracy	±2% RH
Relative Humidity Stability	Better than 0.5% RH
Stabilization Time to Set point	about 10 Minutes
Operating Temperature (ambient)	15-35°C (60-100°F)
Temperature accuracy read-out	±0.3 °C (±0.5 °F)
Transmitter Power Supply	15 VDC , ±10% at 30 mA Max.
Display	3 ½ digit LCD, 0.5" High
Voltage Read-out	0-1, 0-5 & 0-10VDC = 0...100.0%
Current Read-out	4-20 mA DC = 0...100.0%
Desiccant Chamber	40g (1.4 Oz) Capacity
Saturator Chamber	25 ml capacity
Dimensions	240 x 185 x 80 mm (9.45 x 7.28 x 3.15 Inches)
Probe Entry	5 x ø18.5mm
Weight	1,5 Kg (3,3 lbs)

All specifications are subject to change without prior notice.

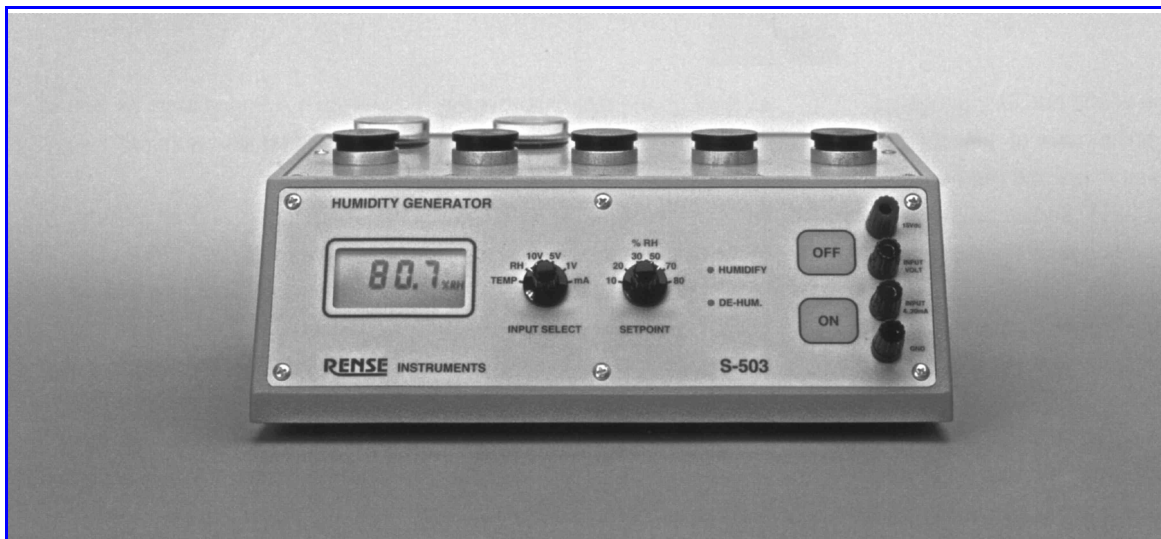

WARRANTY

All products manufactured by Rense Instruments are warranted to be free of defect in material and workmanship for a period of one year after delivery

RENSE

DEVELOPMENT AND MANUFACTURING OF ELECTRONIC INSTRUMENTS

INSTRUMENTS BV

Burg. V. Campenhoutstraat 61
NL-4921 KR MADE
THE NETHERLANDS

Phone +31-162-470580
Fax +31-162-437566

E-mail sales@rense.nl
Internet www.rense.nl